



**POLYTAC® / POLYTAC® HP  
LITHIUM POWER POLYMER FLASHLIGHT**

**MARKET:** Sporting Goods, Fire & Rescue, Law Enforcement, Security, Hardware/Tool, Industrial, Automotive, Consumer.

**DESCRIPTION:** The PolyTac® is a bright and compact personal polymer light available with the latest in power LED technology and three different user selectable programs. The light features a superior grip texture to provide a comfortable but slip resistant feel. Packaged with a removeable pocket clip.

**CASE MATERIAL:** High impact super tough nylon polymer for exceptional durability and a sure grip. All openings o-ring or gasket sealed. Available in black, yellow or coyote.

<b>DIMENSIONS:</b>	<b>PolyTac®:</b> Length: 5.34 in. (13.56 cm) Body Diameter: 1.00 in. (2.54 cm) Head Diameter: 1.25 in. (3.18 cm) Major Diameter: 1.36 in. (3.45 cm)	<b>PolyTac® HP:</b> Length: 5.90 in. (14.98 cm) Body Diameter: 1.00 in. (2.54 cm) Head Diameter: 1.68 in. (4.26 cm)
--------------------	---	--

**WEIGHT:** PolyTac®: 4.2 oz (121 grams)\* PolyTac® HP: 5.2 oz (148 grams)\*

**LENS:** PolyTac®: Glass lens, o-ring sealed.  
PolyTac® HP: Unbreakable polycarbonate with scratch-resistant coating, o-ring sealed.


**LIGHT SOURCE:** C4®LED technology, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:** See charts for specific model.



**RUN TIME:** See charts for specific model. All claims to 10% of initial lumen output.  
**ON/OFF:** Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP™ programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

**BATTERIES:** Two (2) 3 Volt CR123A Lithium batteries with a shelf life of 10 years.



**FEATURES:** C4® LED technology.  
LED Solid State Power Regulation provides maximum light output throughout battery life.  
IPX7 rated design; waterproof to 1 meter for 30 minutes.  
3 meter impact resistance tested.  
Superior grip texture for sure grip.  
TEN-TAP™ programmable switch allows user selection of one of three different programs.  
Removable pocket clip.  
Serialized for positive identification


**APPROVALS:** Meets applicable European Community Directives **CE**  
PolyTac® meets requirements of NFPA 1971-8.6 (2007)  
Note: PolyTac® HP is not recommended for Fire Helmet mounting.

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**OPTIONAL ACCESSORIES:** PolyTac®: Holster, Safety Wands, Colored Flip Lenses. PolyTac® HP: N/A

	POLYTAC®			POLYTAC® HP		
	FL1 STANDARD	HIGH	LOW	FL1 STANDARD	HIGH	LOW
<b>OUTPUT</b>	275 LUMENS	275 LUMENS	14 LUMENS	275 LUMENS	275 LUMENS	14 LUMENS
<b>RUNTIME</b>	3h	3h	65h	3h	3h	56h
<b>DISTANCE</b>	195m	195m	45m	275m	275m	63m
<b>INTENSITY</b>	9,500cd	9,500cd	500cd	19,000cd	19,000cd	1,000cd

**Strobe Runtime: 5h 30m**

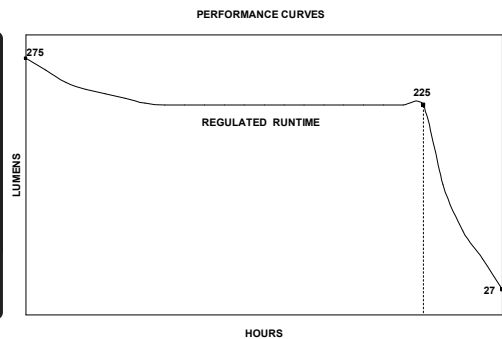

\*With batteries; batteries included in purchase  
All performance claims tested to ANSI/NEMA FL1-2009 Standard  
Issued: 10/24/2013  
Revised: 11/08/2013 Rev: 1